

# **Module 1: Graded Quiz**


# LATEST SUBMISSION GRADE 100%

✓ Correct

1. Measurements are drawn from a Gaussian distribution with variance  $\sigma^2$ . Which of the estimators below 1 / 1 point will provide the 'best' estimate of the true value of a parameter? Select any/all that apply: Weighed Least Squares Correct Correct! Even when all variances are identical, weighted least squares can be applied. Least Squares ✓ Correct Correct! Since all of the variances are identical, ordinary least squares can be used. Maximum Likelihood Correct Correct! By definition, a maximum likelihood estimator will find the parameter value with the greatest likelihood of being the 'true' value. ML and LS estimators are equivalent in this case. Which of the following statements are correct? Select any/all that apply: 2 / 2 points Least squares estimators are significantly affected by outliers. Correct! Outliers are not well handled by least squares estimators, since these estimators minimize the sum of squared errors. When measurements are drawn from a non-Gaussian distribution, a maximum likelihood estimator produces the same values as weighted least squares. When measurement noise comes from a large number of independent sources, a least squares estimator can be used.

Correct! The Central Limit Theorem states that when a noise comes from a large number of independent sources, the noise distribution will tend towards a Gaussian distribution.

3.

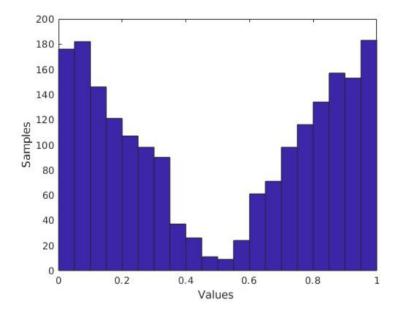

Given the above histogram of noisy measurements, it is appropriate to use a LS estimator?

- True
- False



#### Correct

Correct! The distribution of the measurements is clearly not Gaussian, which suggests that least squares will do a poor job.

- 4. Looking at the histogram in the previous question, what could be the reason for such a distribution of measurements? Select any/all that apply:
  - The measured value might be changing.



## Correct

Correct! If the measured value is changing (e.g., perhaps switching between two discrete values), the histogram will have multiple peaks.

There is an outside disturbance affecting the sensor.



### Correct

Correct! Even if the measured value is static, a disturbance affecting the sensor (e.g., unmodeled vibrations or someone moving the sensor) might cause significantly different measurements to be produced.

The measurement is affected by zero mean Gaussian noise.

1 / 1 point